

BMP28-1SMC(Product No.:207100021101)

Product Feature

- Supporting Hot Plug-in of Front 48V Driver
- Input Reverse Connection Protection
- DIP Selection Current
- Supporting short circuit and overload protection

Technical Parameters


Model	BMP28-1SMC	
Input	Efficiency	93%@48VDC, full load
	Voltage	48VDC
	Frequency	/
	Current	0.63Amax@48VDC, full load
	Inrush Current	/
Output	Current/voltage/power	350mA/9-40VDC/14W 500mA/9-40VDC/20W 550mA/9-40VDC/22W 700mA/9-40VDC/28W
	Ripple Current	<3%
	Channel	1
	Current Tolerance	±8%(9-40VDC)
	No-load Output Voltage	/
	Turn On Delay Time	<0.6s, at 48VDC
Protection	Short Circuit	Shut down the output, recovers automatically after fault removed
	Over Load	When the output voltage is exceeded, the output current decreases and, recovers automatically when the load is reduced.
Others	Working Temp.	-20°C~60°C
	Storage Temp., Humidity	-40°C~85°C, 20-90%RH
	Tc	80°C
	Material	PC
	Ip Rating	IP20
	Lifetime	50,000h@ta:50°C
	Warranty Condition	5 Year
	Switch Cycle	>100,000 times
	Packing(Weight)	Net weight: 15g±5%/PCS; 200PCS/Carton; 3.7kg±5%/Carton; Carton Size: 276*180*136mm(L*W*H)
	Dimension	125*14*10mm(L*W*H)

Current Selection Table


ON	OFF	1	2		
		350mA	500mA	550mA	700mA
		9-40V	9-40V	9-40V	9-40V

Remark: Function default setting is: 350mA (@switch are all OFF state)

Dimension(mm)

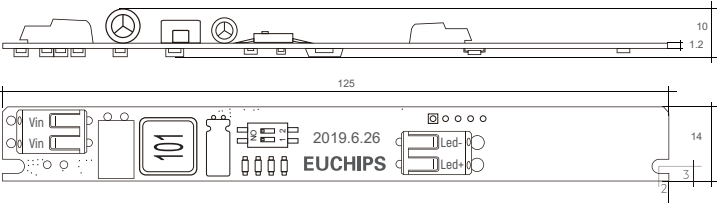

Wiring Diagram

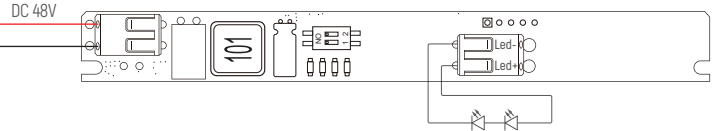

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail. Please contact us if you have any questions.