

PUP10-1WMC-350

Summary

PUP10-1WMC-350 is AC/DC constant current mode output LED driver featuring the multiple levels selectable by DIP switch.

Product Features



- Input voltage of 120VAC ~ 277VAC
- Protections: Short circuit, Over load, Over voltage
- Suitable for indoor LED lighting application

Technical Paramaters

Model	PUP10-1WMC-350				
Output	Current/Voltage/Power	120mA/9-42V/5.04W 150mA/9-42V/6.3W	180mA/9-42V/7.56W 210mA/9-42V/8.82W	260mA/9-38V/9.88W 290mA/9-34V/9.86W	320mA/9-31V/9.92W 350mA/9-28V/9.8W
	Channel	1			
	No load output voltage	58V Max			
	Current Accuracy	±5%			
	LF current ripple(<120Hz)	<3%			
Input	Voltage	120VAC-277VAC			
	Frequency	50/60Hz			
	Efficiency	≥85%@120VAC, Full load			
	PF	≥0.99@120VAC, Full load			
	THD(full load)	<10%@120VAC, Full load			
	Current	0.6Amax@120VAC			
	Inrush Current	Cold start,30A@120VAC			
	Standby Power	<1W			
Protection	Over Voltage	Hiccup, recovers after fault condition is removed			
	Over load	Hiccup, recovers after fault condition is removed			
	Short circuit	Close output, recovers automatically after fault removed			
Safety& EMC	Surge	L-N:1KV			
	Withstand Voltage	I/P-O/P: 3000VAC/1min/5mA; I/P-Gnd: 1500VAC/1min/5mA; O/P-Gnd: 500VAC/1min/5m			
	Safety standards	UL8750/UL1310/CSA25013,CSA class P			
	EMC Eission	EN50515,EN61000-3-2 Class C,IEC61000-3-3			
	EMC Immunity	FCC class B(120V)/class A(277V)			
Others	Dimension	75*35*26.5mm(L*W*H)			
	G.W	120g			
	IP rating	IP20			
	Working temp.	-20°C~50°C			
	tc	90°C			
	Relative humidity	20~90% RH			
	Lifetime	50,000h@tc:85°C			
	Material	PC			
	Switch cycle	>100,000 times			

Remark: Use only within an enclosure

Dimension(mm)

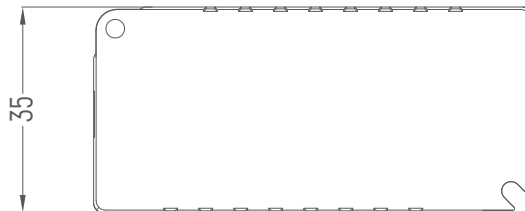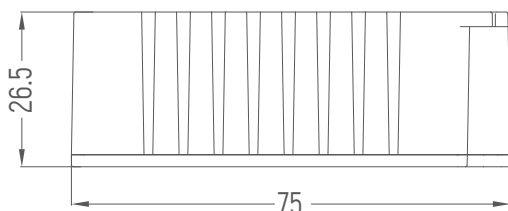

Application



Downlight



Panel Light



Spotlight



Ceiling Light



Decorative Light



Floor Light



Track Light



Flood Light



110V



M/M



UL



SELV




Class P



Class 2

Wring Diagram

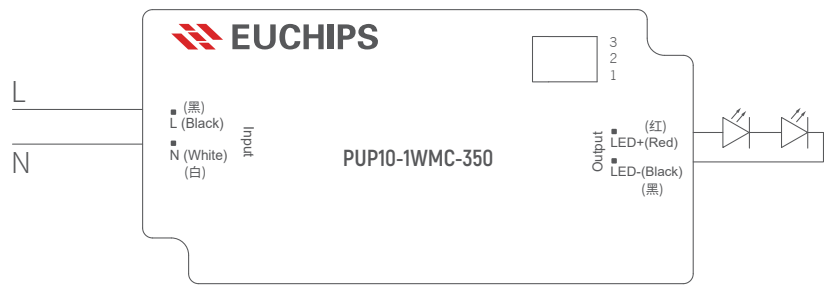

Current Selection Table

PUP10-1WMC-350 is a multi-current dimming driver, output current level selectable by DIP S.W., as the following:

		1  2  3 	  	  	  	  	  	  	  
ON	OFF	120mA	150mA	180mA	210mA	260mA	290mA	320mA	350mA
		9-42V	9-42V	9-42V	9-42V	9-38V	9-34V	9-31V	9-28V

Remark: Function default setting is:120mA (@switch are all OFF state)

Cautions

- 1.This product should be installed by qualified personnel.
- 2.This product is non waterproof, need to avoid sun and rain.In case of outdoor use, please ensure it is mounted in a water proof enclosure.
- 3.Good heat dissipation conditions extend product life.Please install the product in a well-ventilated environment.
- 4.Please make sure LED power supply output voltage, current is used to meet the product requirements.
- 5.Please ensure that adequate sized cable is used from the controller to the LED lights to carry the current. Please also ensure that the cable is secured tightly in the connector.
- 6.Due to safety concerns, PVC or rubber cord of 0.75-2.5mm2 is recommended for input and output terminal(s) (excluding signal terminals). Flat power cord is not suitable.Ensure all wire connections and polarities are correct before applying power to avoid any damages to the LED lights.
- 7.In case of malfunction, do not repair it yourself.